# 

## HomeSiren Fibra

#### Wired indoor siren.



The device is compatible only with hubs supporting Fibra protocol. Find the detailed



information via QR code or at the link:

https://ajax.systems/support/devices/homesiren-fibra/

HomeSiren Fibra is the device of the new Fibra wired product line. Such devices can only be purchased, installed and administered by accredited Ajax Systems partners.





Adjustable alarms and notifications volume level: from 81 to 105 dB



Adjustable alarm duration: from 3 to 180 seconds








LED indicator



Notifications on security mode change and delays when entering/leaving



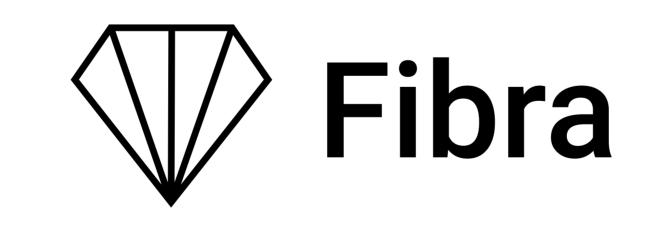

#### communication technology




**Fibra** is a **two-way wired protocol**, ensuring fast and secure communication between hubs and devices. Based on a **bus connection method**, Fibra delivers instant data-rich alarms: security companies and users know which device was triggered, when and where it happened.


Fibra features **encryption** and **authentication** to prevent forgery, as well as **polling** to display device status in real time. Supporting **up to 2,000 m** of wired connectivity, Fibra is ready to protect any facilities, and deliver **the best user experience** for both end users and installers.

Technical Data Sheet: HomeSiren Fibra

## System features




Connecting to the hub via bus method



Up to 2,000 m of two-way encrypted communication

12–300 sec Adjustable polling interval




Adding to the security system via QR code or bus scanning



Remote configuring via the smartphone







### Technical specifications

Compliance with standards

EN 50131 (Grade 3) PD 6662:2017 INCERT SSF

Compatibility

Hub Hybrid (2G) Hub Hybrid (4G)

Range extenders

no

Features

Types of notifications Acoustic LED Alarm volume from 81 to 105 dB at a distance of 1 m Adjusted by PRO or user with admin rights in the Ajax app

**Alarm duration** 

Communication with control panel

Fibra communication technology

Communication range up to 2,000 m With U/UTP cat.5, 4×2×0,51 cable

Polling interval 12–300 s Adjusted by PRO or user with admin rights in the

from 3 to 180 s Adjusted by PRO or user with admin rights in the Ajax ap

Built-in siren operating frequency 3.4 ± 0.5 kHz Ajax app

Technical Data Sheet: HomeSiren Fibra

2

Features	Additional LED connection Available, 3 V==	Power supply	24 V=, up to 50 μA
Enclosure	Colour	Installation	Operating temperature
	white, black		range
			from -10°C to +40°C
	Dimensions		
	90,5 × 90,5 × 33 mm		<b>Operating humidity</b>
			up to 75%
	Weight		
	84 g		<b>Protection class</b>
			IP50
	Tampering alarm		
Complete set	HomeSiren Fibra		
	SmartBracket		
	mounting panel		
	Installation kit		
	Quick Start Guide		

Technical Data Sheet: HomeSiren Fibra