

# 12-24V PSU for Hub / Hub Plus / ReX

An alternative power supply unit connecting Ajax control panels and range extenders to low-voltage sources. Replaces the built-in 110/230 V~ power supply unit.


Find the detailed information on the device at the link:





ajax.systems/support/devices/12-24V-PSU



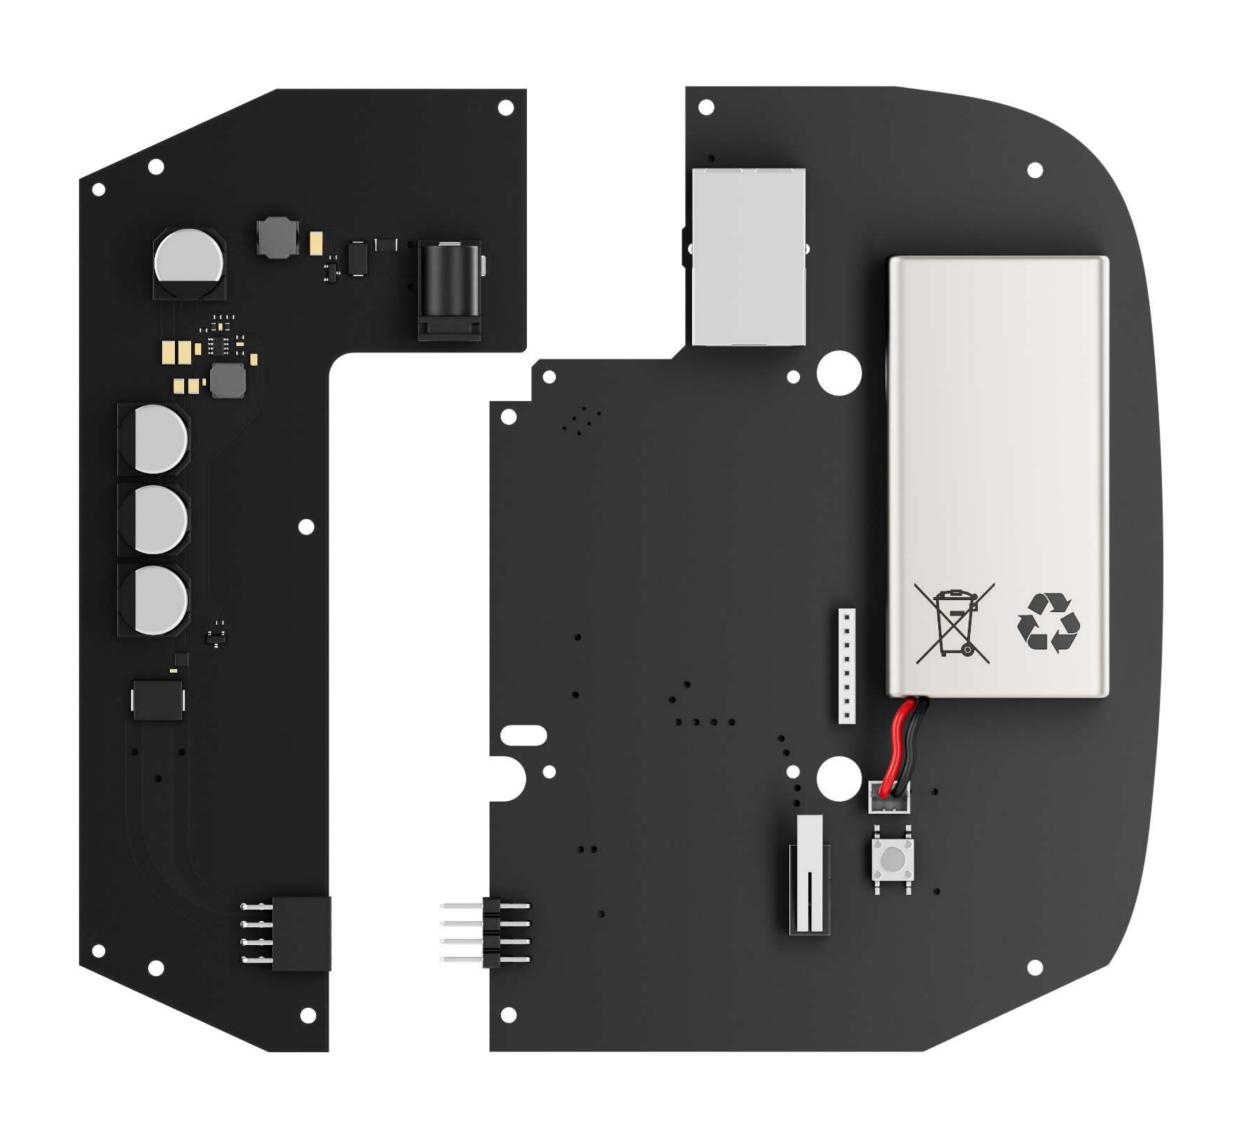

## Installation

It will take about 10 minutes for a professional electrician to install an alternative power supply unit into a control panel or range extender.

12–24V PSU features a standard socket connecting the power jack plug and a terminal adapter in the set. The process requires one PH1 screwdriver and the installation manual:

ajax.systems/support/devices/12-24V-PSU





Alternative power supply units are also available for Hub 2, Hub 2 Plus, and ReX 2. Detailed information is available at the link: ajax.systems/products/12vpsu-hub2/

## How to use

#### At a warehouse

Use Ajax security system in premises lacking electricity or having an unstable power supply. A 12–24 V= power supply unit allows connecting hub and radio signal extenders to low-voltage networks or using a portable battery.

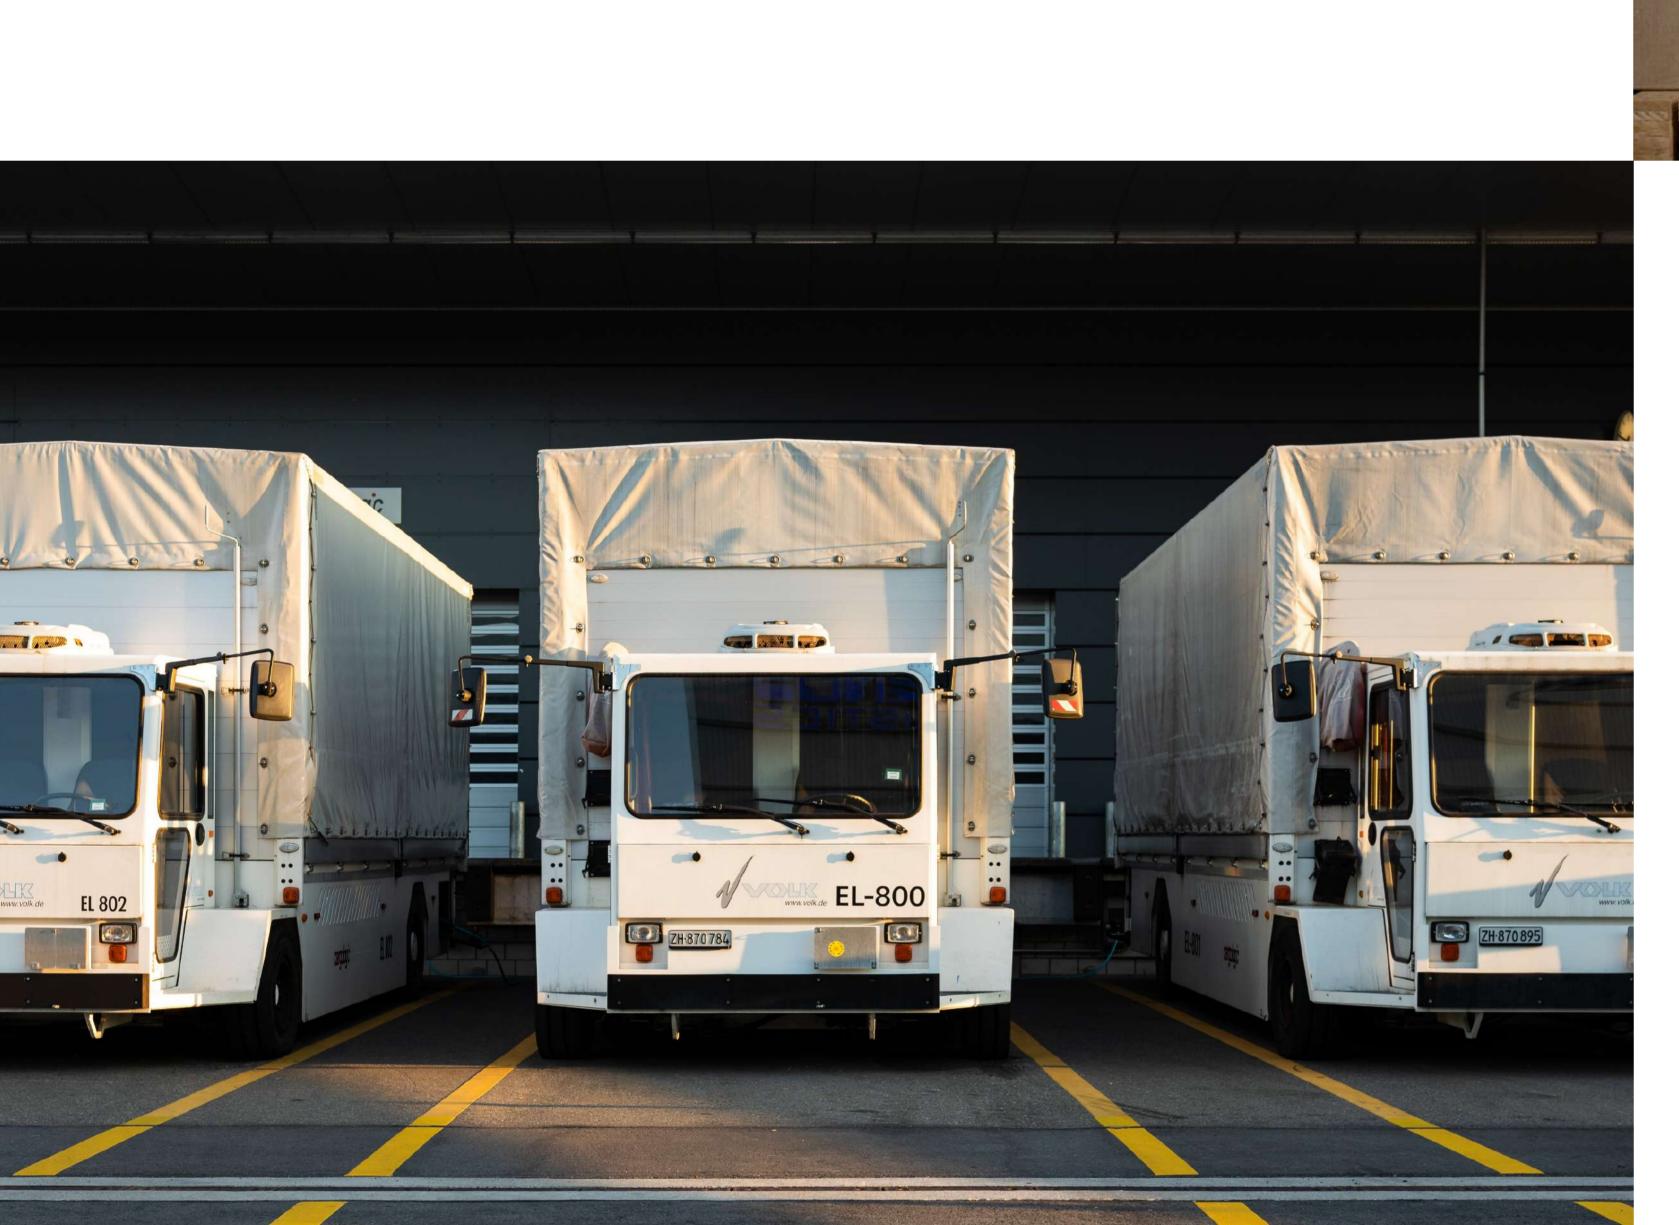

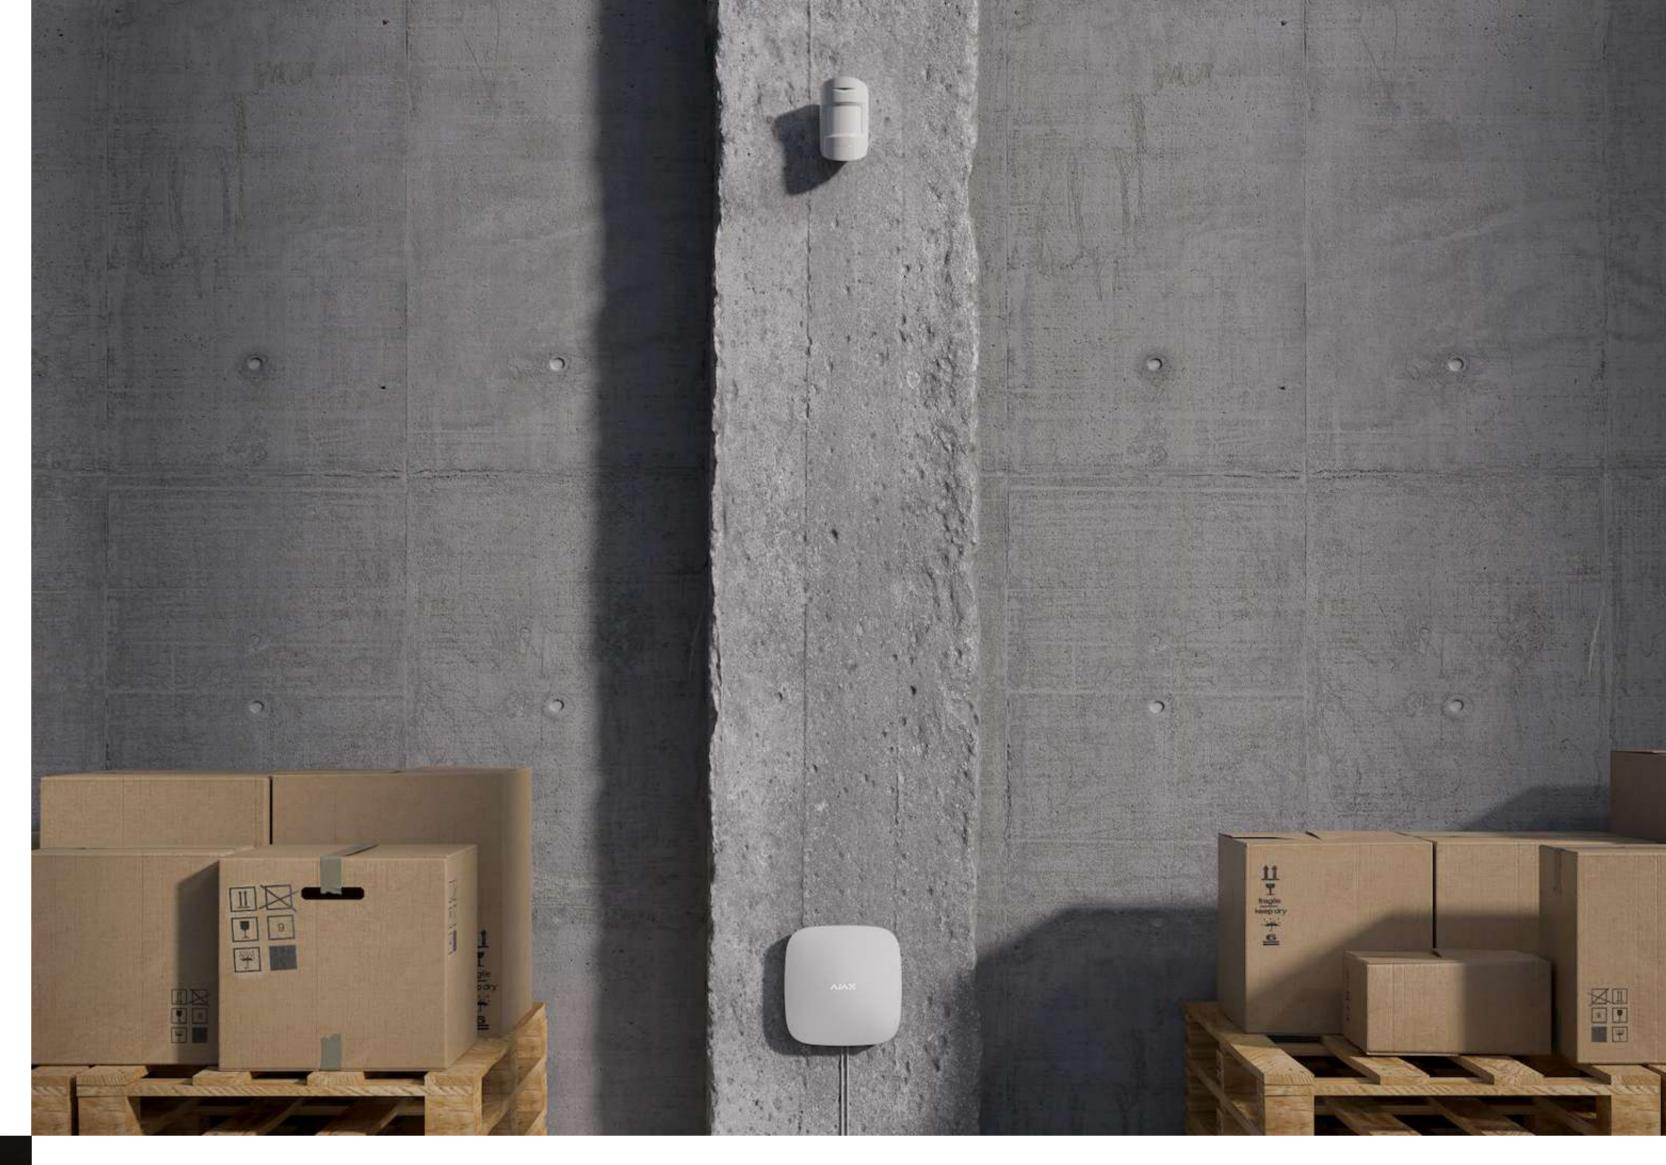

#### In a trailer or a truck

Connect the hub to a car or portable battery, and the security system will travel with the driver to protect property or cargo.

#### On a yacht

Insert a SIM card and connect the hub to the on-board network or battery so that Ajax guards the boat at the pier.



# Technical specifications

Compatibility	Hubs	Connection to	Socket
	Hub Dhio	mains	6.5 × 2 mm
	Hub Plus		Dlua
	Dongo ovtondoro		Plug F F v 2 1 mm
	Range extenders		5.5 × 2.1 mm
	ReX		Power jack
Input	Voltage	Output	Voltage
	8-32 V==		4.65 V== ± 5%
	Current		Current
	up to 1 A		up to 1.5 A
	Switch-on voltage		
	8 V== ± 2.5%		
	Switch-off voltage		
	7-7.5 V==		
	Depending on the load		
Installation	Installation method	Body	Colour
	inside the hub or range		N/A
	extender body		
			Dimensions
	Operating temperature		138 × 64 × 13 mm
	range		
	from -10°C to +40°C		Weight
			30 g
	Operating humidity		
	up to 75%		
Complete set	12-24V PSU for Hub /		
	Hub Plus / ReX		
	Terminal adapter		
	Quick Start Guide		