

Baseline product line

#### CombiProtect Jeweller


Wireless motion and glass break detector









# Motion detection

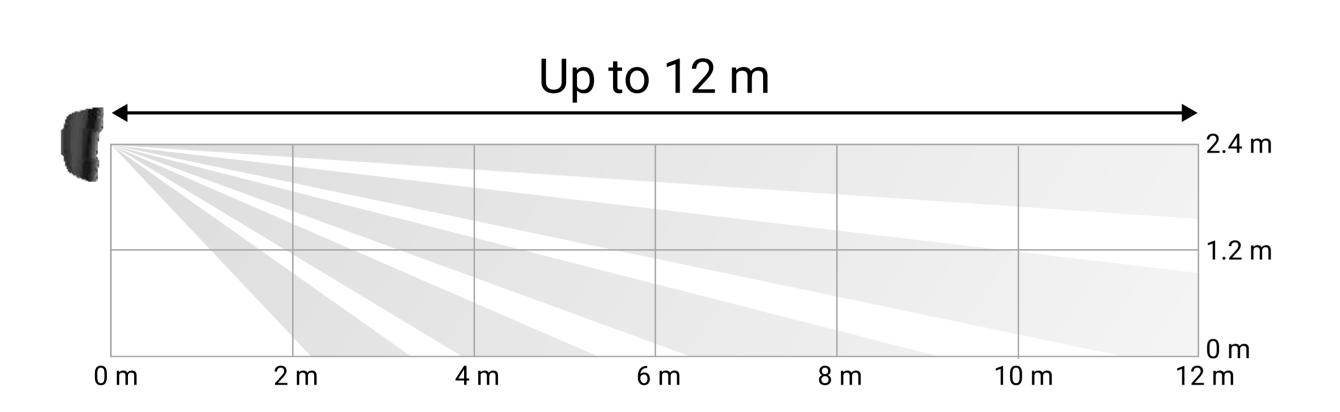


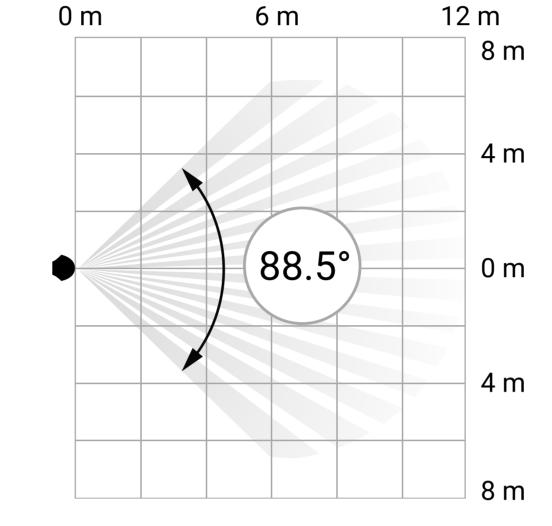

- SmartDetect algorithm to prevent false alarms
- Temperature compensation
- Pet immunity

## Glass break detection

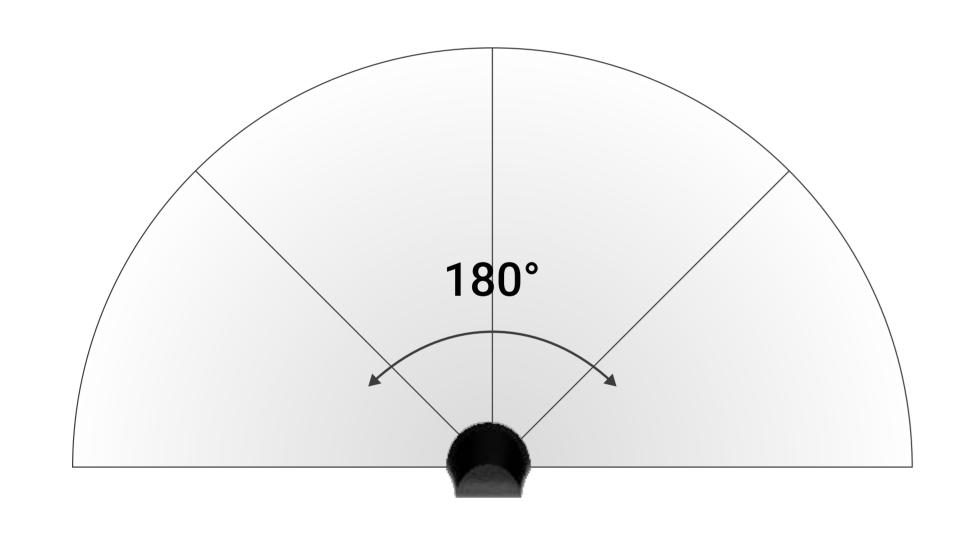

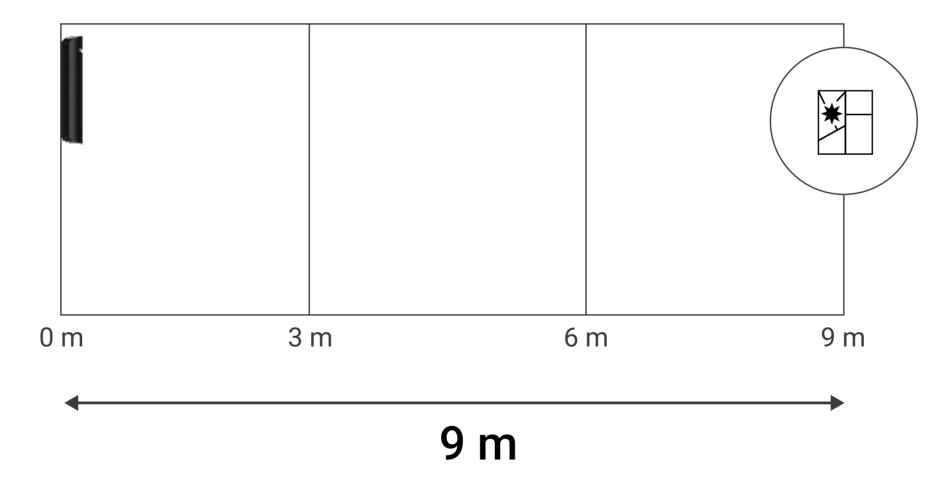

- DualTone two-factor glass break verification algorithm: by low and high frequencies
- Filter for false alarms caused by dog barking or truck-passing sounds



## Jeweller

communication technology

- Up to 1,200 m of radio communication in an open space
- Encryption and device authentication to prevent spoofing
- Regular polling to display current device statuses




# Flawless autonomy

- Up to 5 years of operation
- Pre-installed replaceable battery
- Low battery warning



### Quick installation and setup

- Pairing with a hub via QR code
- Remote control and configuration in the app
- Effortless installation and maintenance

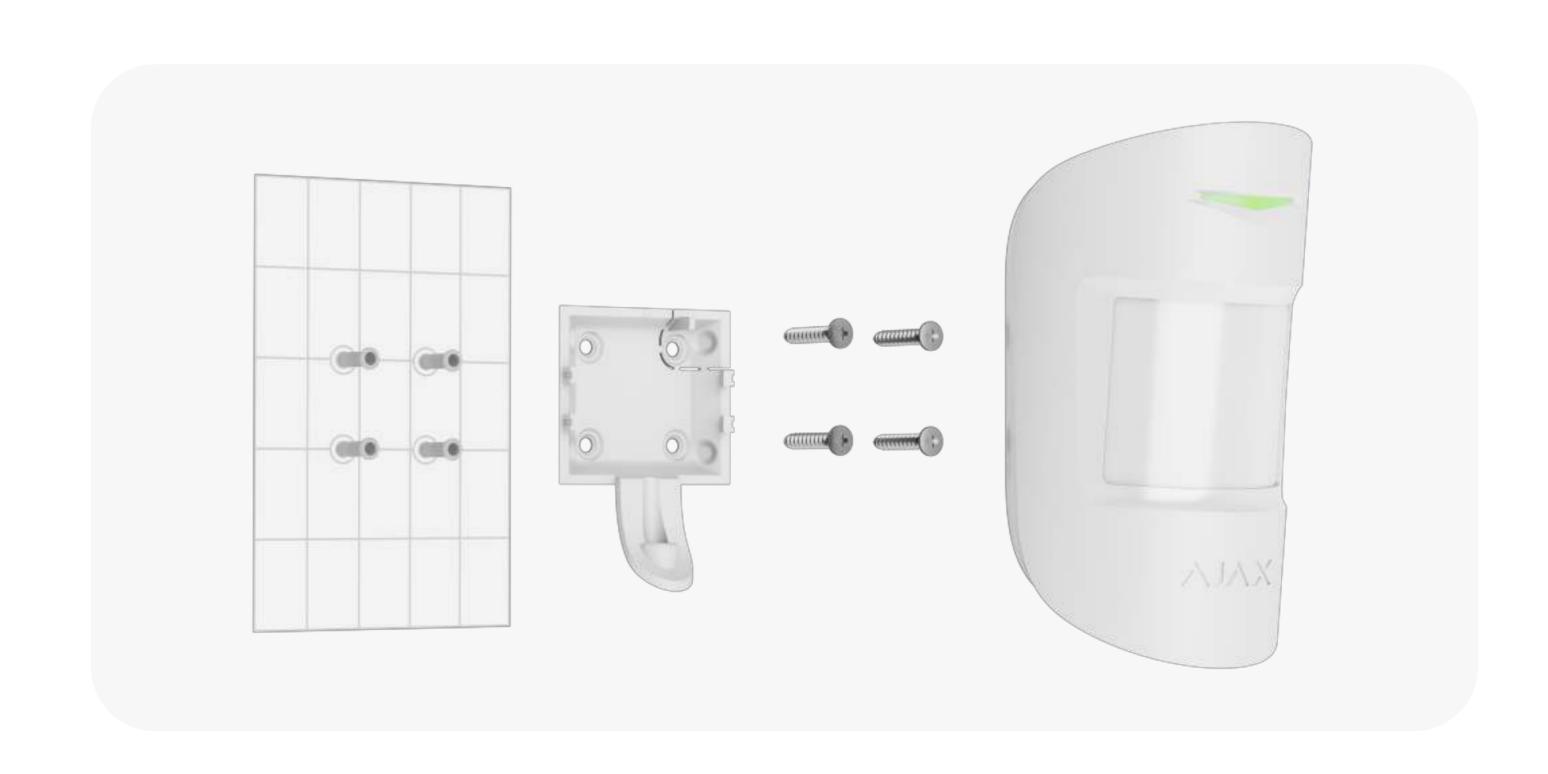

Compliance	Communication with control panel	Motion detection	Glass break detection
EN 50131-2-2 (Grade 2) PD 6662:2017	Jeweller communication technology	Sensitive element 1 × PIR sensor	Sensitive element  1 × electret microphone
Compatibility	Frequency bands 866.0-866.5 MHz 868.0-868.6 MHz 868.7-869.2 MHz	Detection distance up to 12 m  Motion detection angle	Detection distance up to 9 m  Horizontal glass break detection
Hub, Hub Plus, Hub 2 (2G), Hub 2 (4G), Hub 2 Plus,	905.0-926.5 MHz 915.85-926.5 MHz 921.0-922.0 MHz Depends on the region of sales.	horizontal — 88.5°  Pet immunity weight: up to 20 kg	angle 180°
Hub Hybrid (2G), Hub Hybrid (4G)  Range extenders	Jeweller communication range up to 1,200 m	height: up to 50 cm	
ReX, ReX 2	In an open space.		
Power supply	Installation	Enclosure	Complete set
Battery 1 × CR123A Pre-installed.	Operating temperature range from -10°C to +40°C	Colour white, black	CombiProtect Jeweller 1 CR123A battery (pre-installed) SmartBracket mounting panel
Battery life up to 5 years	Operating humidity up to 75%	Dimensions 110 × 65 × 50 mm	Installation kit Quick start guide
	Protection class IP50	<b>Weight</b> 92 g	







ajax.systems





For detailed information, scan the QR code or follow the link: